



## CONFIGURATION EXAMPLES

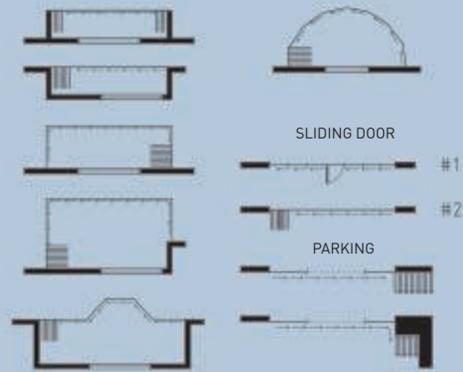

## BOTTOM TRACK POSSIBILITIES

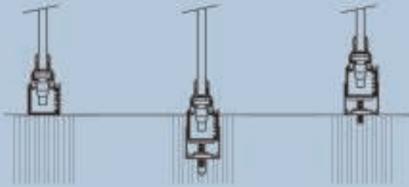

## SIDE VIEW



## POSSIBLE COMBINATIONS

- Bottom track recessed/sunken with or without compensator channel
- Bottom track surface-mounted to the floor with/without compensator channel
- Panels travelling through angles from 90° to 180°
- Possibility of angles < 90°
- Corner doors

## ALUMINIUM BASED SYSTEM

- Compatible with market standards 40x40 tracks
- Structural aluminum (minimum thickness 3 mm = 1/8" approx.)

## ADJUSTMENT/LEVELING

- Up to 25 mm (63/64") using the compensator channel on the bottom
- Up to 50 mm (1.97" approx.) using the compensator channel on both top and bottom.

## OPENING POSSIBILITIES

- Panels can stack to one side, to the other, to both, inside and/or outside at the same time
- Doors can be placed on one or both sides, on a corner, on the center and/or nearly anywhere else desired
- Opening with/without arm
- Standard system with top and bottom locking mechanism
- Ventilation position

## LOCKING POSSIBILITIES

- Stainless-steel and/or other finishes locks with or without key
- Any locking type available for glass doors
- Side lock with/without key
- Fix ventilation position in systems with arm

## GLASS

- Tempered and/or laminated
- Thickness: 6 mm (1/4"), 8 mm (5/16"), 10 mm (3/8"), 12 mm (1/2")

## FINISHES

- All Rat colors
- Wood-like colors
- Anodized colors

## DIMENSIONS

- Maximum width recommended for standard system panels : 800 mm -31.5" (Doors 900 mm - 35.44")
- Maximum recommended height: 3000 mm (10 ft)

## RESTAURANTS



## INTERIOR PARTITIONS



## PORCHES



## BALCONIES



## SECURITY AND RELIABILITY




TODOCRISTAL ALLGLASS Paseo de la Hispanidad, Nave 55 T4 B60 Pol. Ind. Alhaurín de la Torre 29130 Málaga  
www.allglasstodocristal.com · info@allglasstodocristal.com · Tel. +34 952 17 20 88 · Fax: +34 952 96 24 11





#### FUNCTIONALITY

Unique to the market, the system weight is carried on the bottom track Todocristal Allglass®'s system, unique in the market, uses gravity as an ally, adding functionality and security. With an average project weight of 400 kgs (882 lbs.) a bottom-supported system is far better and safer than a top-hanging system.

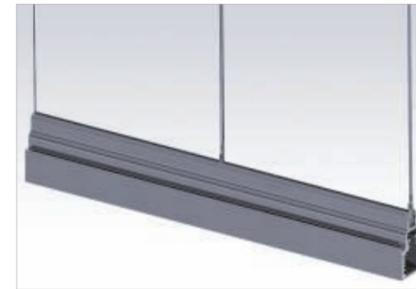


#### STRENGTH

The panels are joined by solid metal pieces to guarantee security, protection and isolation against the wind and rain.



#### RELIABILITY

No wheels, no bearings and no rollers of any kind. All panels slide smoothly resulting in a very reliable and a very low maintenance system.

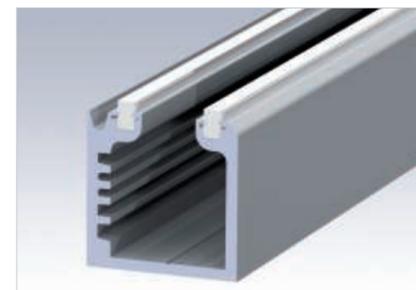


#### WITH OR WITHOUT ARM

You can choose between a configuration with or without an opening arm. The last option provides a clean aesthetic and allows easy installation of curtains or blinds.



#### SIMPLE QUALITY

Only first quality materials are used in our system. Compared to other systems Todocristal Allglass® uses far less plastic-based components. Components are kept to a minimum, using fewer than any other system. Our parts are durable, corrosion-resistant and long-lasting.

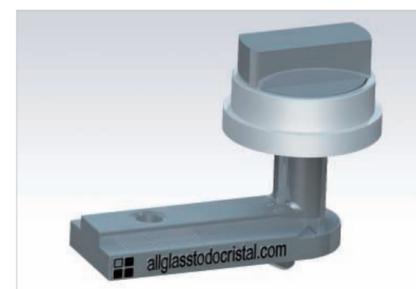


#### SIDE LOCK

Our innovative side lock offers you greater security, water tightness and a stylish aesthetic. With its handle and key you can open and close your system very easily.



#### WATER RESISTANCE

Our system provides optimum water resistance as there are no plastic gaskets in between profile joints. Components assembled with aluminum to aluminum joints prevent penetration by water and wind. Furthermore, the water resistance of our system is improved by being bottom weighted.

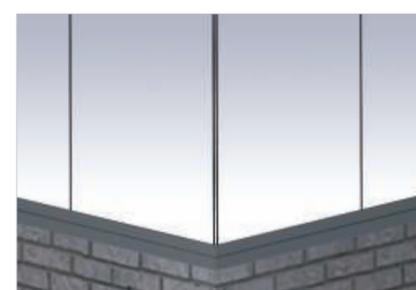

#### SECURE LOCK

Any standard locking solution can be used with the Todocristal Allglass® system, adding to security and letting you choose between a wide range of possibilities with or without key.



#### SECURITY AND RELIABILITY WITH BEAUTY

Security and reliability play a key role in the design and development of the product. We pay special attention to its aesthetic beauty, giving the system a soft, rounded profile and line unique to the market. The result is the most advanced technology, beauty, design and function.



#### COMPENSATOR CHANNEL

The Todocristal Allglass® system can be completely recessed on the floor in a very clean and secure way. The compensator channel makes it possible to adjust the height of the system.

